

Open Top Steel Drum

SDF 213
CDF 210

Errors and omissions excepted

SL Packaging GmbH
Bünder Straße 105
32051 Herford
GERMANY
tel +49 5221 99444-0
fax +49 5221 99444-580
info@slpackaging.de
www.sl-packaging.eu




Product details



CDF 210

Volume	Steel plate thickness			Weight	UN approval
	top	body	bottom		
210 l	1,0 mm	0,8 mm	1,0 mm	16,2 kg	UN 1A2/X270/Y300/Z300/S/*/NL/ TCPI-SL1-110508
210 l	1,0 mm	0,9 mm	1,0 mm	17,35 kg	UN 1A2/X270/Y300/*/NL/SL 3173
210 l	1,0 mm	1,0 mm	1,0 mm	18,3 kg	UN 1A2/X270/Y300/S/*/NL/SL 2605
210 l	1,0 mm	1,0 mm	1,0 mm	19,0 kg	UN 1A2/X270/Y300/S/*/NL/SL 2616 UN 1A2/Y1.5/150/*/NL/SL 2617
213 l	1,0 mm	0,8 mm	1,0 mm	16,5 kg	UN 1A2/Y284/S/*/NL/SL 2750
213 l	1,0 mm	0,9 mm	1,0 mm	18,0 kg	UN 1A2/Y284/S/*/NL/SL 2751
213 l	1,0 mm	1,0 mm	1,0 mm	18,6 kg	UN 1A2/X280/Y370/S/*/NL/SL 2023
213 l	1,0 mm	1,0 mm	1,0 mm	19,5 kg	UN 1A2/Y1.5/100/*/NL/SL 1301 UN 1A2/X280/Y370/S/*/NL/SL 2946
213 l	1,2 mm	1,2 mm	1,2 mm	22,1 kg	UN 1A2/Y288/S/*/NL/SL 2032
213 l	1,2 mm	1,2 mm	1,2 mm	22,6 kg	UN 1A2/Y1.2/100/*/NL/SL 1294
213 l	1,2 mm	1,2 mm	1,2 mm	22,8 kg	UN 1A2/Y350/S/*/NL/SL 2975

SDF 213
CDF 210

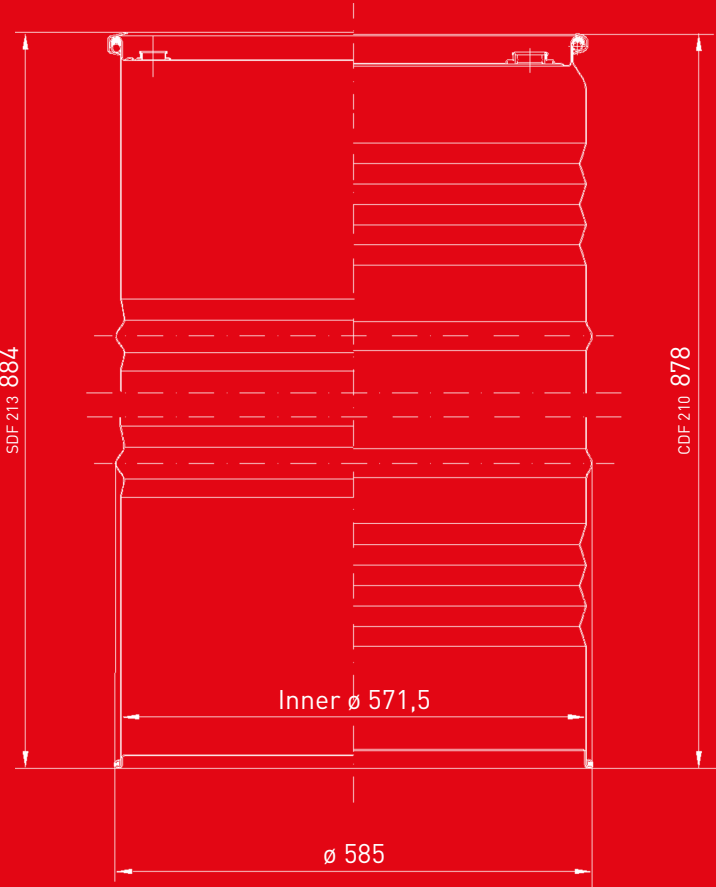

SPECIFICATION

- In compliance with ISO 15750-1, made of commercial grade steel sheet according to ISO 3574, fulfilment of EU guideline 94/62, body seam welded, bottom end with sealing compound specially folded (safety fold), lid with foam rubber gasket, galvanised locking lever ring
- Tested for packaging groups I, II and III
- With UN approval* (for all carrier)
- All drum types according to DOT 49 CFR § 178.608 (vibration standard)
- Marking in accordance with VPA 6
- Draining of residue

* UN-approved SL open top drums for liquids are double marked and therefore also accredited for solid matters

HOOPS

- Rolling hoops, W-hoops, container hoops, optionally additional corrugations or straight sided

CLOSURE

- Manufactured according to ISO 15750-3
- Lid with G2 + G¾
- Closure material steel or plastics (PP)
- Closure design:
 - phosphatised
 - galvanised
 - galvanised and coated

SURFACES

- Outside:
 - single or multi-colour stove-enamelled
- Inside:
 - raw, free of oil/grease
 - temporary corrosion protection
 - stove-enamelled, FDA approved (suitable for food)
- PE inner liner optional
- Screen print optional