

XL Drum

SFF 235

Errors and omissions excepted

SL Packaging GmbH
Bünder Straße 105
32051 Herford
GERMANY
tel +49 5221 99444-0
fax +49 5221 99444-580
info@slpackaging.de
www.sl-packaging.eu




Product details



SFF 235

Volume	Steel plate thickness			Weight	UN approval
	top	body	bottom		* year of production
235 l	1,0 mm	0,9 mm	1,0 mm	17,5 kg	UN 1A1/X/250/./D/BAM 12997-SL (SL1) UN 1A1/X292 Y418 Z418/S/./D/BAM 12997-SL (SL1)
235 l	1,0 mm	1,0 mm	1,0 mm	19,5 kg	UN 1A1/X/250/./D/BAM 12906 - SL (SL1) UN 1A1/X292 Y418 Z418/S/./D/BAM 12906- SL (SL1)

SFF 235

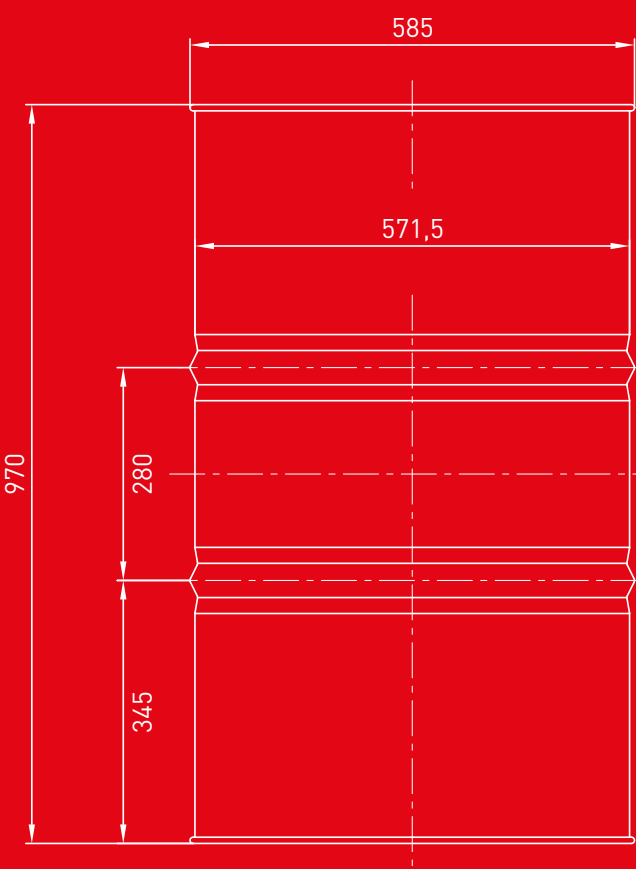

SPECIFICATION

- According to ISO 15750-2, made of commercial grade steel sheet according to ISO 3574, fulfilment of EU guideline 94/62, body seam welded, ends with sealing compound specially folded (safety fold).
- tested for packaging groups I, II and III
- with UN approval for liquid and solid matters (for all carrier)
- all approved drum types according to DOT 49 CFR § 178.608 (vibration standard)
- marking in accordance with VPA 6
- draining of residue

* UN-approved SL XL-Drums for liquids are double marked and therefore also accredited for solid matters.

HOOPS

- rolling hoops, W-hoops, container hoops, optionally additional corrugations

CLOSURES

- manufactured according to ISO 15750-3
- top end with G2 + G¾ / 2 x G2 / third bung optionally
- closure material steel or plastics (PP/PA)
- closure design:
 - galvanised, galvanised and coated
 - special types upon request

SURFACES

- Outside:
 - single or multi-colour stove-enamelled
- Inside:
 - raw, free of oil/grease
 - temporary corrosion protection
 - stove-enamelled, (Coating FDA approved), galvanized
- screen print, stickers/labels optional

RFID

- optionally equipped with RFID technology for automatic identification (according to DIN 6113)